

# Multifunctional autonomous scale 9260 from 3 to 30kg

## STRUCTURE

- ABS
- Stainless steel AISI 304
- (W) 300 x (D) 230 mm

## PROTECTION

- Watertightness IP56
- Load cell overload

## USE

- From +10° to +40°C
- Humidity < 60%

## INPUT VOLTAGE

- Releasable
- 100-240V, 50/60Hz
- 12 VDC 1000mA

## BATTERY


- Rechargeable
- 6V4.5Ah
- Autonomy 40h
- Charging time 12h

## OVERALL DIMENSIONS

- W : 300 mm
- D : 320 mm
- H : 120 mm

## NET WEIGHT

- 4kg




## DISPLAY

- Height : 18 mm
- LCD backlit

## FUNCTIONS

- Weighing, taring
- Counting
- Totalization
- Units : g/kg

- Delivered with a protective cover

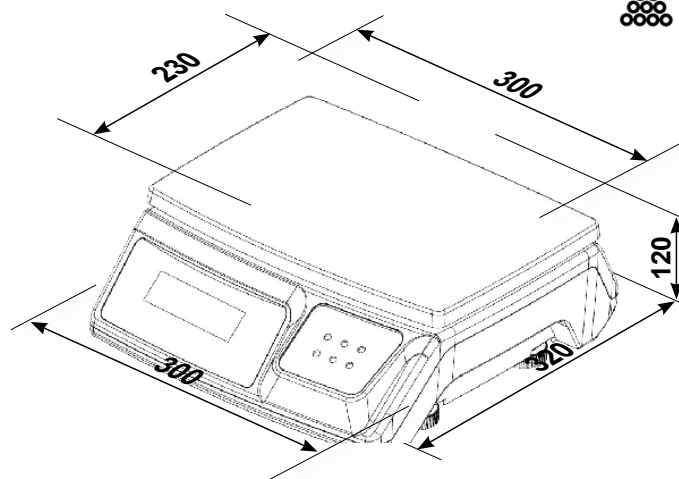

Tél : 01 34 53 35 35  
Fax : 01 39 85 31 32  
Mail : [info@manutan.fr](mailto:info@manutan.fr)

[www.manutan.fr](http://www.manutan.fr)

|         | Capacity (kg) | Accuracy (g) | Certification    |
|---------|---------------|--------------|------------------|
| A016141 | 3kg           | 0,1g         | Local adjustment |
| A169775 |               |              | Cofrac (UKAS)    |
| A016142 | 6kg           | 0,2g         | Local adjustment |
| A169785 |               |              | Cofrac (UKAS)    |
| A019360 | 15kg          | 0,5g         | Local adjustment |
| A169727 |               |              | Cofrac (UKAS)    |
| A019361 |               | 1g           | Local adjustment |
| A169786 |               |              | Cofrac (UKAS)    |