



Counting scale 9860 from 3 to 30kg

STRUCTURE

- ABS
- Stainless steel AISI 304
- (W) 300 x (D) 230 mm

PROTECTION

- Watertightness IP56
- Load cell overload

USE

- From +10° to +40°C
- Humidity < 60%

DISPLAY

- LCD blue backlit

INPUT VOLTAGE

- Releasable
- 100-240V, 50/60Hz
- 12 VDC 800mA

BATTERY


- Rechargeable
- 6V4.5Ah
- Autono Dmy 70h
- Charging time 12h

OVERALL DIMENSIONS

- W : 300 mm
- D : 320 mm
- H : 115 mm

NET WEIGHT

- 4kg




DISPLAY

- Height : 18 mm
- 3 displays LCD

FUNCTIONS

- Weighing, taring (direct or by tabulation).
- Counting by sampling or by tabulation of the weight of the piece.
- **200** reference weight memories.
- Totalization of weighings and counted pieces.
- Supplied with power cord, internal battery and protective cover.

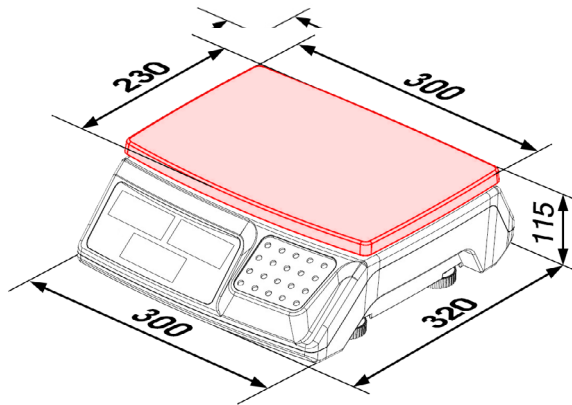

	capacity	accuracy	Resolution	Certification
A019371	3kg	0,05g	0,05g	Local adjustment
A169682				Cofrac (UKAS)
A016185	6kg	0,1g	0,1g	Local adjustment
A169785				Cofrac (UKAS)
A016186	15kg	0,2g	0,2g	Local adjustment
A169704				Cofrac (UKAS)
A016187	30kg	0,5g	0,5g	Local adjustment
A169707				Cofrac (UKAS)



Tél : 01 34 53 35 35
 Fax : 01 39 85 31 32
 Mail : info@manutan.fr

www.manutan.fr