

Counting scale with bright column 9880 from 3 to 30kg



STRUCTURE

- ABS
- Stainless steel
- (W) 300 x (D) 230 mm

PROTECTION

- Watertightness IP56
- Load cell overload

USE

- From +10° to +40°C
- Humidity < 60%

DISPLAY

- LCD backlight

INPUT VOLTAGE

- Releasable
- 100-240V, 50/60Hz
- 12 VDC 1000mA

BATTERY


- Rechargeable
- 6V4.5Ah
- Autonomy 70h
- Charging time 12h

OVERALL DIMENSIONS

- W : 310 mm
- D : 340 mm
- H : 120 mm

NET WEIGHT

- 4kg



DISPLAY


- Height : 18 mm
- 3 displays LCD (3 colors in +/- control mode)

FUNCTIONS

- Weighing, taring (direct or by tabulation).
- Counting by sampling or by tabulation of the reference weight.
- 99 reference weight memories.
- Totalization of weighings and counted pieces.
- (+/-) control function in weight or in counted rooms.
- 99 (+/-) thresholds memories.
- Numeric keypad.



Conforme à la tolérance définie

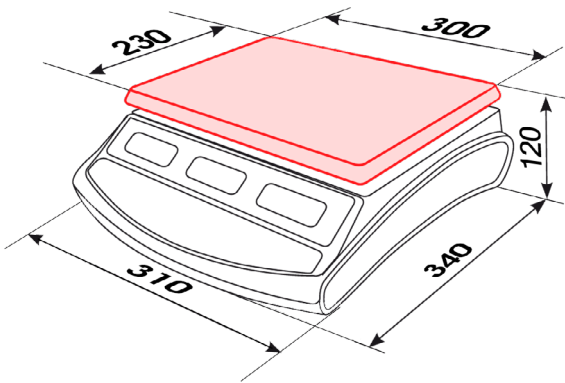

Tél : 01 34 53 35 35
Fax : 01 39 85 31 32
Mail : info@manutan.fr

www.manutan.fr

	capacity	accuracy	Resolution	Certification
A120814	3kg	0,05g	0,05g	Local adjustment
A169708				Cofrac (UKAS)
A120815	6kg	0,1g	0,1g	Local adjustment
A169687				Cofrac (UKAS)
A120816	15kg	0,2g	0,2g	Local adjustment
A169681				Cofrac (UKAS)
A120817	30kg	0,5g	0,5g	Local adjustment
A169705				Cofrac (UKAS)