

Stainless steel compact scale GX from 3 to 30kg



STRUCTURE

- ABS
- Stainless steel AISI 304
- (W) 225 x (D) 185 mm

PROTECTION

- Watertightness IP56
- Load cell overload

USE

- From +5° to +40°C
- Humidity < 80%

INPUT VOLTAGE

- Integrated
- 210-230V, 50/60Hz
12 VAC 0.83A 10VA

BATTERY


- Rechargeable
6V4.5Ah
- Autonomy 40h
Charging time 12h

OVERALL DIMENSIONS

- W : 230 mm
- D : 280 mm
- H : 110 mm

NET WEIGHT

- 3.6kg




DISPLAY

- Height : 18 mm
- LED (red diodes)
- Front and rear

FUNCTIONS

- Weighing, taring
- Counting by sampling
- Units : g/kg - lb

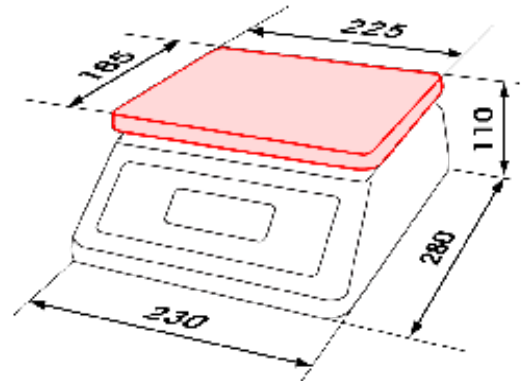

Tél : 01 34 53 35 35
Fax : 01 39 85 31 32
Mail : info@manutan.fr

www.manutan.fr

	Capacity (kg)	Accuracy (g)	Certification
A129431	3kg	0,2g	Local adjustment
A169744			Cofrac (UKAS)
A129433	6kg	0,5g	Local adjustment
A169779			Cofrac (UKAS)
A129432	15kg	1g	Local adjustment
A169790			Cofrac (UKAS)
A129434	30kg	2g	Local adjustment
A169789			Cofrac (UKAS)