

Balance high accuracy **LAB-S** From 410 to 5000g



STRUCTURE

- ABS / aluminum finish
- Stainless steel

PROTECTION

- Watertightness IP44
- Load cell overload

USE



- From +13° to +25°C
- Humidity < 60%

INPUT VOLTAGE

- Input : 220V, 50Hz
- Output : 7,5V-600mA

DIMENSIONS

- W : 230 mm
- D : 310 mm
- H : 90 mm

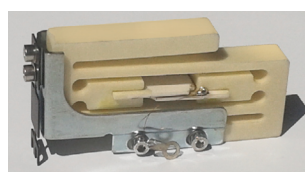



Ceramic sensor

DISPLAY

- Height : 28 mm
- LCD backlit

FUNCTIONS

- Weighing, taring
- Counting by sampling
- Determination of weighings in percentage
- +/- control function
- Hold function
- Units : g, %, PCS, O₂, Ct, Dwt
- RS232 output

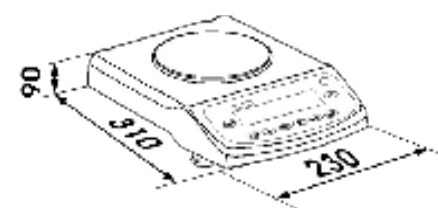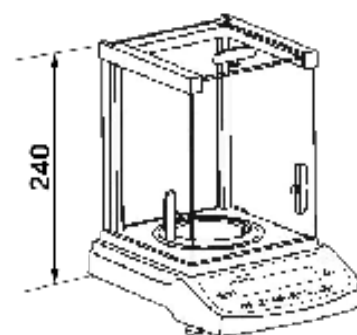

Tél : 01 34 53 35 35
Fax : 01 39 85 31 32
Mail : info@manutan.fr

www.manutan.fr

	Capacity (g)	Resolution (g)	Tray (mm)	Certification
A128876	410g	0,001g	 Ø 115	Local adjustment
A169793				Cofrac (UKAS)
A128879	1200g	0,01g	 Ø 160	Local adjustment
A169803				Cofrac (UKAS)
A128877	3200g	0,01g		Local adjustment
A169800				Cofrac (UKAS)
A128881				Local adjustment
A169778	5000g	0,01g		Cofrac (UKAS)