

Laboratory scale **LAB-800** from 150 to 3000 g



STRUCTURE

- ABS
- Stainless steel

PROTECTION

- Watertightness IP44
- Load cell overload

USE

- From +10° to +40°C
- Humidity < 85%

INPUT VOLTAGE

- Releasable
- 100-240V, 50/60Hz
12 VDC 1000mA

BATTERY


- Rechargeable
6V1.2AH/1000mA
- Autonomy 70h

OVERALL DIMENSIONS

- W : 200 mm
- D : 248 mm
- H : 74 mm

NET WEIGHT

- 2.3kg




DISPLAY

- Height : 28 mm
- LCD backlit

FUNCTIONS

- Weighing, taring.
- +/- control function.
- 99 (+/-) thresholds memories.
- Counting by sampling or by tabulation of the reference weight.
- 99 reference weight memories.
- Units : g/kg - lb.
- Weighing and Counting in %
- Data transmission by USB and RS232.

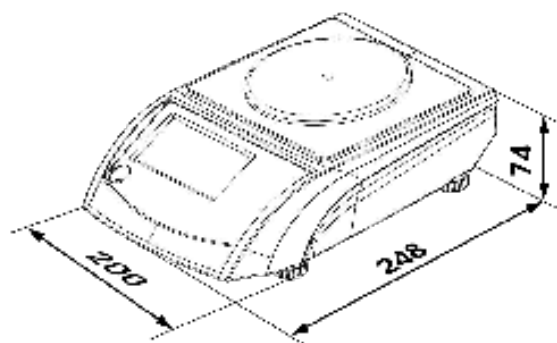

Tél : 01 34 53 35 35
Fax : 01 39 85 31 32
Mail : info@manutan.fr

www.manutan.fr

	Capacity (g)	Resolution (g)	Tray (mm)	Certification
A016139	150g	0,005g	Ø 116	Local adjustment
A169807				Cofrac (UKAS)
A016140	600g	0,01g	Ø 116	Local adjustment
A169776				Cofrac (UKAS)
A019358	1200g	0,02g	144x120	Local adjustment
A169757				Cofrac (UKAS)
A019359	3000g	0,1g	144x120	Local adjustment
A169802				Cofrac (UKAS)