

Stainless steel compact scale S30-I from 6 to 30kg



STRUCTURE

- All stainless AISI 304
- Stainless steel
- (W) 250 x (D) 197 mm

PROTECTION

- Watertightness IP67
- Load cell overload

USE

- From 0° to +40°C
- Humidity < 80%

INPUT VOLTAGE

- Releasable
- 100-240V, 50/60Hz
- 12V 800mA

BATTERY


- Rechargeable
- 6V5.0Ah
- Autonomy 40h

OVERALL DIMENSIONS

- W : 297 mm
- D : 398 mm
- H : 98 mm

NET WEIGHT

- 4.3kg




DISPLAY

- Height : 25 mm
- 3 displays LCD (3 colors in +/- control mode)

FUNCTIONS

- Weighing, taring
- 20 tare memories
- Counting by sampling
- 99 reference weight memories
- Totalization of weighings and counted pieces
- (+/-) control function in weight or in counted rooms
- Weighing and Counting in %
- 99 (+/-) thresholds memories
- Units : g, kg, lb, PCS
- RS232

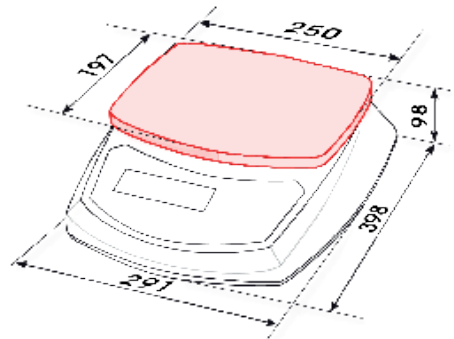

Tél : 01 34 53 35 35

Fax : 01 39 85 31 32

Mail : info@manutan.fr

www.manutan.fr

	capacity (kg)	accuracy (g)	Resolution (g)	Certification
A016147	6kg	0,5g	0,5g	Local adjustment
A169679				Cofrac (UKAS)
A016148	15kg	1g	1g	Local adjustment
A169780				Cofrac (UKAS)
A016149	30kg	2g	2g	Local adjustment
A169788				Cofrac (UKAS)